


Reliable Screening

Advanced Screening Audiometer ASA94

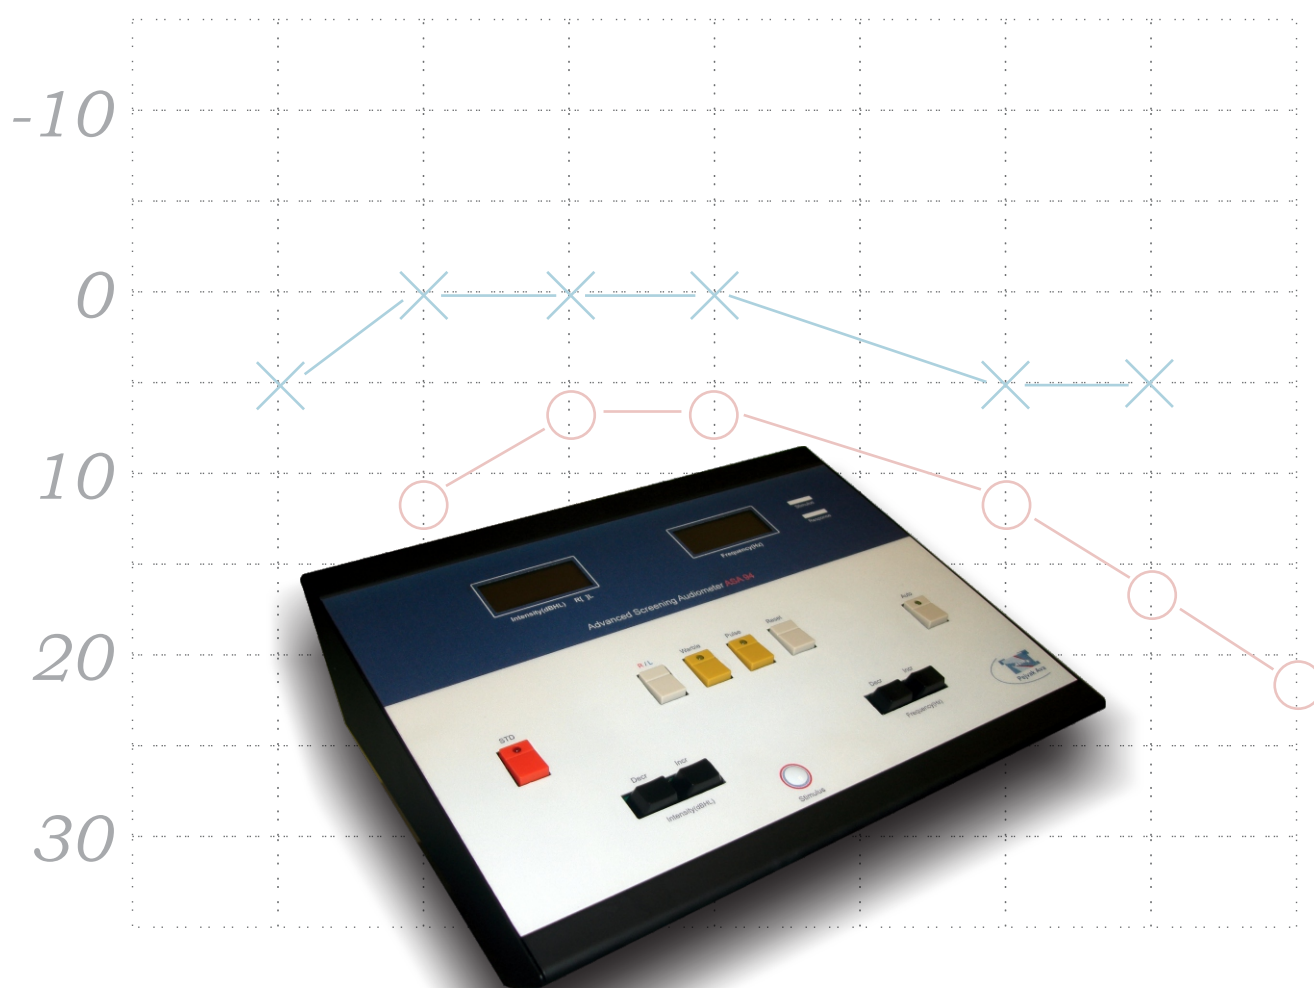

Pejvak Ava Corp.
Audiology Equipment

Screening Audiometer ASA 94



ASA94 Technical Specifications

Standards :

Tone audiometer type:4
Calibration:ISO389

Channels : One channel.

Frequencies and Maximum Hearing Levels:

Hz	AC
125	*
250	80
500	100
750	100
1000	100
1500	100
2000	100
3000	100
4000	100
6000	80
8000	80

Channel 1 :Input:Tone

Output:Left,Right.

Presentations Ch1 :Manual,
single pulses.

Frequency Range: 250-8000 Hz.

Frequency Resolution:1/2 octave steps.

Modulation:Warble:5Hz

Attenuator:

Totally Click free, 0 to 100 dB HL in 5 &10dB Steps.

Tone Switches:

Silent touch tone switch.

Patient Response:

One patient response button,

Reset Mode:

For Quick audiometry.

Test Types:

Tone: Manual, single pulse, Automatic Screening
Audiometry.

Free Field:

2x12W external amplifier and two speakers.
(Optional)

Communication:

No Available.

Dimensions: LxWxH: 24x17.5x7.5cm.

Weight: 2000 gr.

Power: AC 50-60 Hz.180-240 V
Auto Power Off System (STD)

Consumption: Max. 5 VA

Included Parts:

Bilsom Screening Audiometric Headset
(Audiocup Noise Excluders)
1 Patient Response Button
Power Cable 240V
Operation Manual
Soft Carrying case

Options:

Ap12 Built-in 2x12 watt Power Amplifier
for Free Field
AP12 Loudspeaker
Hard Carrying case

